

Standard Configuration 1D Scanner ART-02949

ART-02949



DEFAULT.

Standard Product Default Settings

To scan the next code use the Trigger in the hole under the scanner.



PAPP M1.

Presentation Mode



PAPI 24.

USB Keyboard (PC)



KBD CTY 0.

*** United States**



DLY RRD 500.

Short (500 ms)



KBD STY 7.

Autocaps via NumLock




AOSODT30000.



MNUSAV.

Save

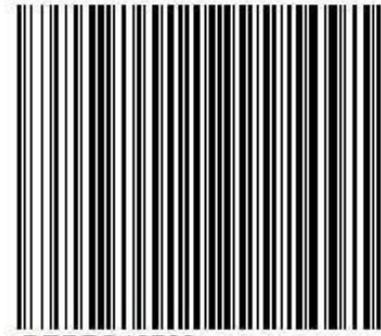

BEPFQ12700.

Fréquence du bip